

# JIS Marine Valves

# RATER

## MARINE BRONZE SCREW-DOWN CHECK ANGLE VALVE 16K JIS F7410

### 船用青铜截止止回阀 16kgf/cm<sup>2</sup>


MATERIAL

Body	Bronze
Bonnet	Bronze or Brass
Disc	Bronze
Seat	Bronze
Stem	Brass
Handwheel	Cast iron

PICTURE



DRAWING

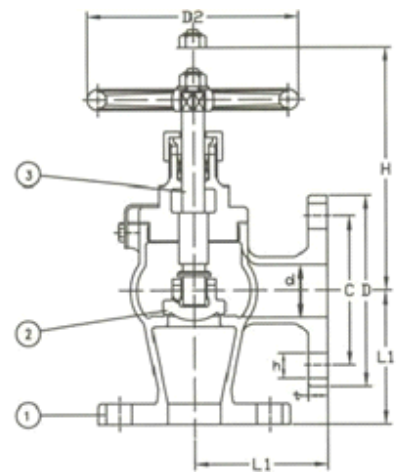

Press ure Rating	
Fluid condition	Maximum working pressure MPa(kgf/cm <sup>2</sup> )
Steam of 205°C or less	1.57 ( 16 )
Air,gas,oil&pulsation water	
Non-shock water of 120°C or less	2.16 ( 22 )

Hydraulic Inspection	
Watertight inspection for valve seat	
Inlet side	2.37MPa(24.2kgf/cm <sup>2</sup> )
Out side	2.37MPa(24.2kgf/cm <sup>2</sup> )
	To 0.39MPa(4kgf/cm <sup>2</sup> )
Hydraulic Inspection for body	3.23MPa(33.0kgf/cm <sup>2</sup> )

### Technical Data

Manufactured in accordance to JIS F7400 • Flanges as per JIS B2220 - 16K •

### DIMENSIONS

CODE	DN	L	D	C	No.	h	t	H	D2
75 10 81	15	70	95	70	4	15	12	120	80
75 10 82	20	75	100	75	4	15	14	130	100
75 10 83	25	85	125	90	4	19	14	145	125
75 10 84	32	95	135	100	4	19	16	150	125
75 10 85	40	100	140	105	4	19	16	165	140

Notice: Unit ( mm )