


## CAST IRON GLOBE VALVES

AVAILABLE MEDIUM	WATER,STEAM PETROLEUM PRODUCTS
WORKING TEMPERATURE	H,T≤200℃ W≤100℃
FLANGE DIMENSONS	DIN2533
FACE TO FACE	DIN3202 F1

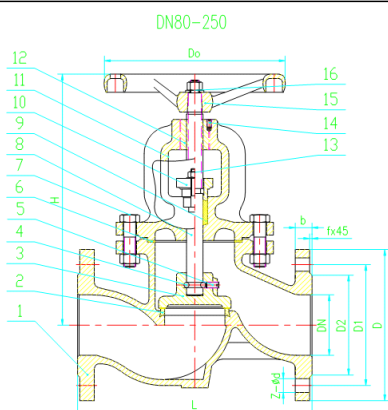

NO	NAME	MATERIAL	NO	NAME	MATERIAL	
1	BODY	GG25	9	PACKING	GRAPHITE	
2	SEAT RING	BRASS/S.S	10	GLAND	GG25	
3	DISC	GG25+BRASS/S.S	11	BONNET	GG25	
4	STEEL BALL		12	STEM NUT	BRASS	DN80-250
5	BOLT	CARBON STEEL	13	BOLT NUT	CARBON STEEL	
6	GASKET	GRAPHITE	14	BOLT	CARBON STEEL	DN80-250
7	BOLT NUT	CARBON STEEL	15	WHEEL	GG25	
8	STEM	STAINLESS STEEL	16	NUT GASKET	CARBON STEEL	

DN	L	D	D1	D2	b	Z-Ød	D0	f	H	WEIGHT KG
15	130	95	65	45	14	4-14	100	3	176	3.32
20	150	105	75	55	16	4-14	100	3	180	3.8
25	160	115	85	65	16	4-14	120	3	232	5.07
32	180	135	100	78	18	4-18	120	3	238	8
40	200	145	110	85	18	4-18	140	3	262	9.39
50	230	160	125	100	20	4-18	140	3	272	11.4
65	290	180	145	120	20	4-18	160	3	323	18
80	310	195	160	135	22	8-18	200	3	353	30.7
100	350	215	180	155	24	8-18	280	3	381	40
125	400	245	210	185	26	8-18	320	3	453	62
150	480	280	240	210	28	8-23	360	3	502	91
200	600	335	295	265	28	12-23	400	3	620	152.2
250	730	405	355	320	32	12-27	400	3	750	208.5